

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



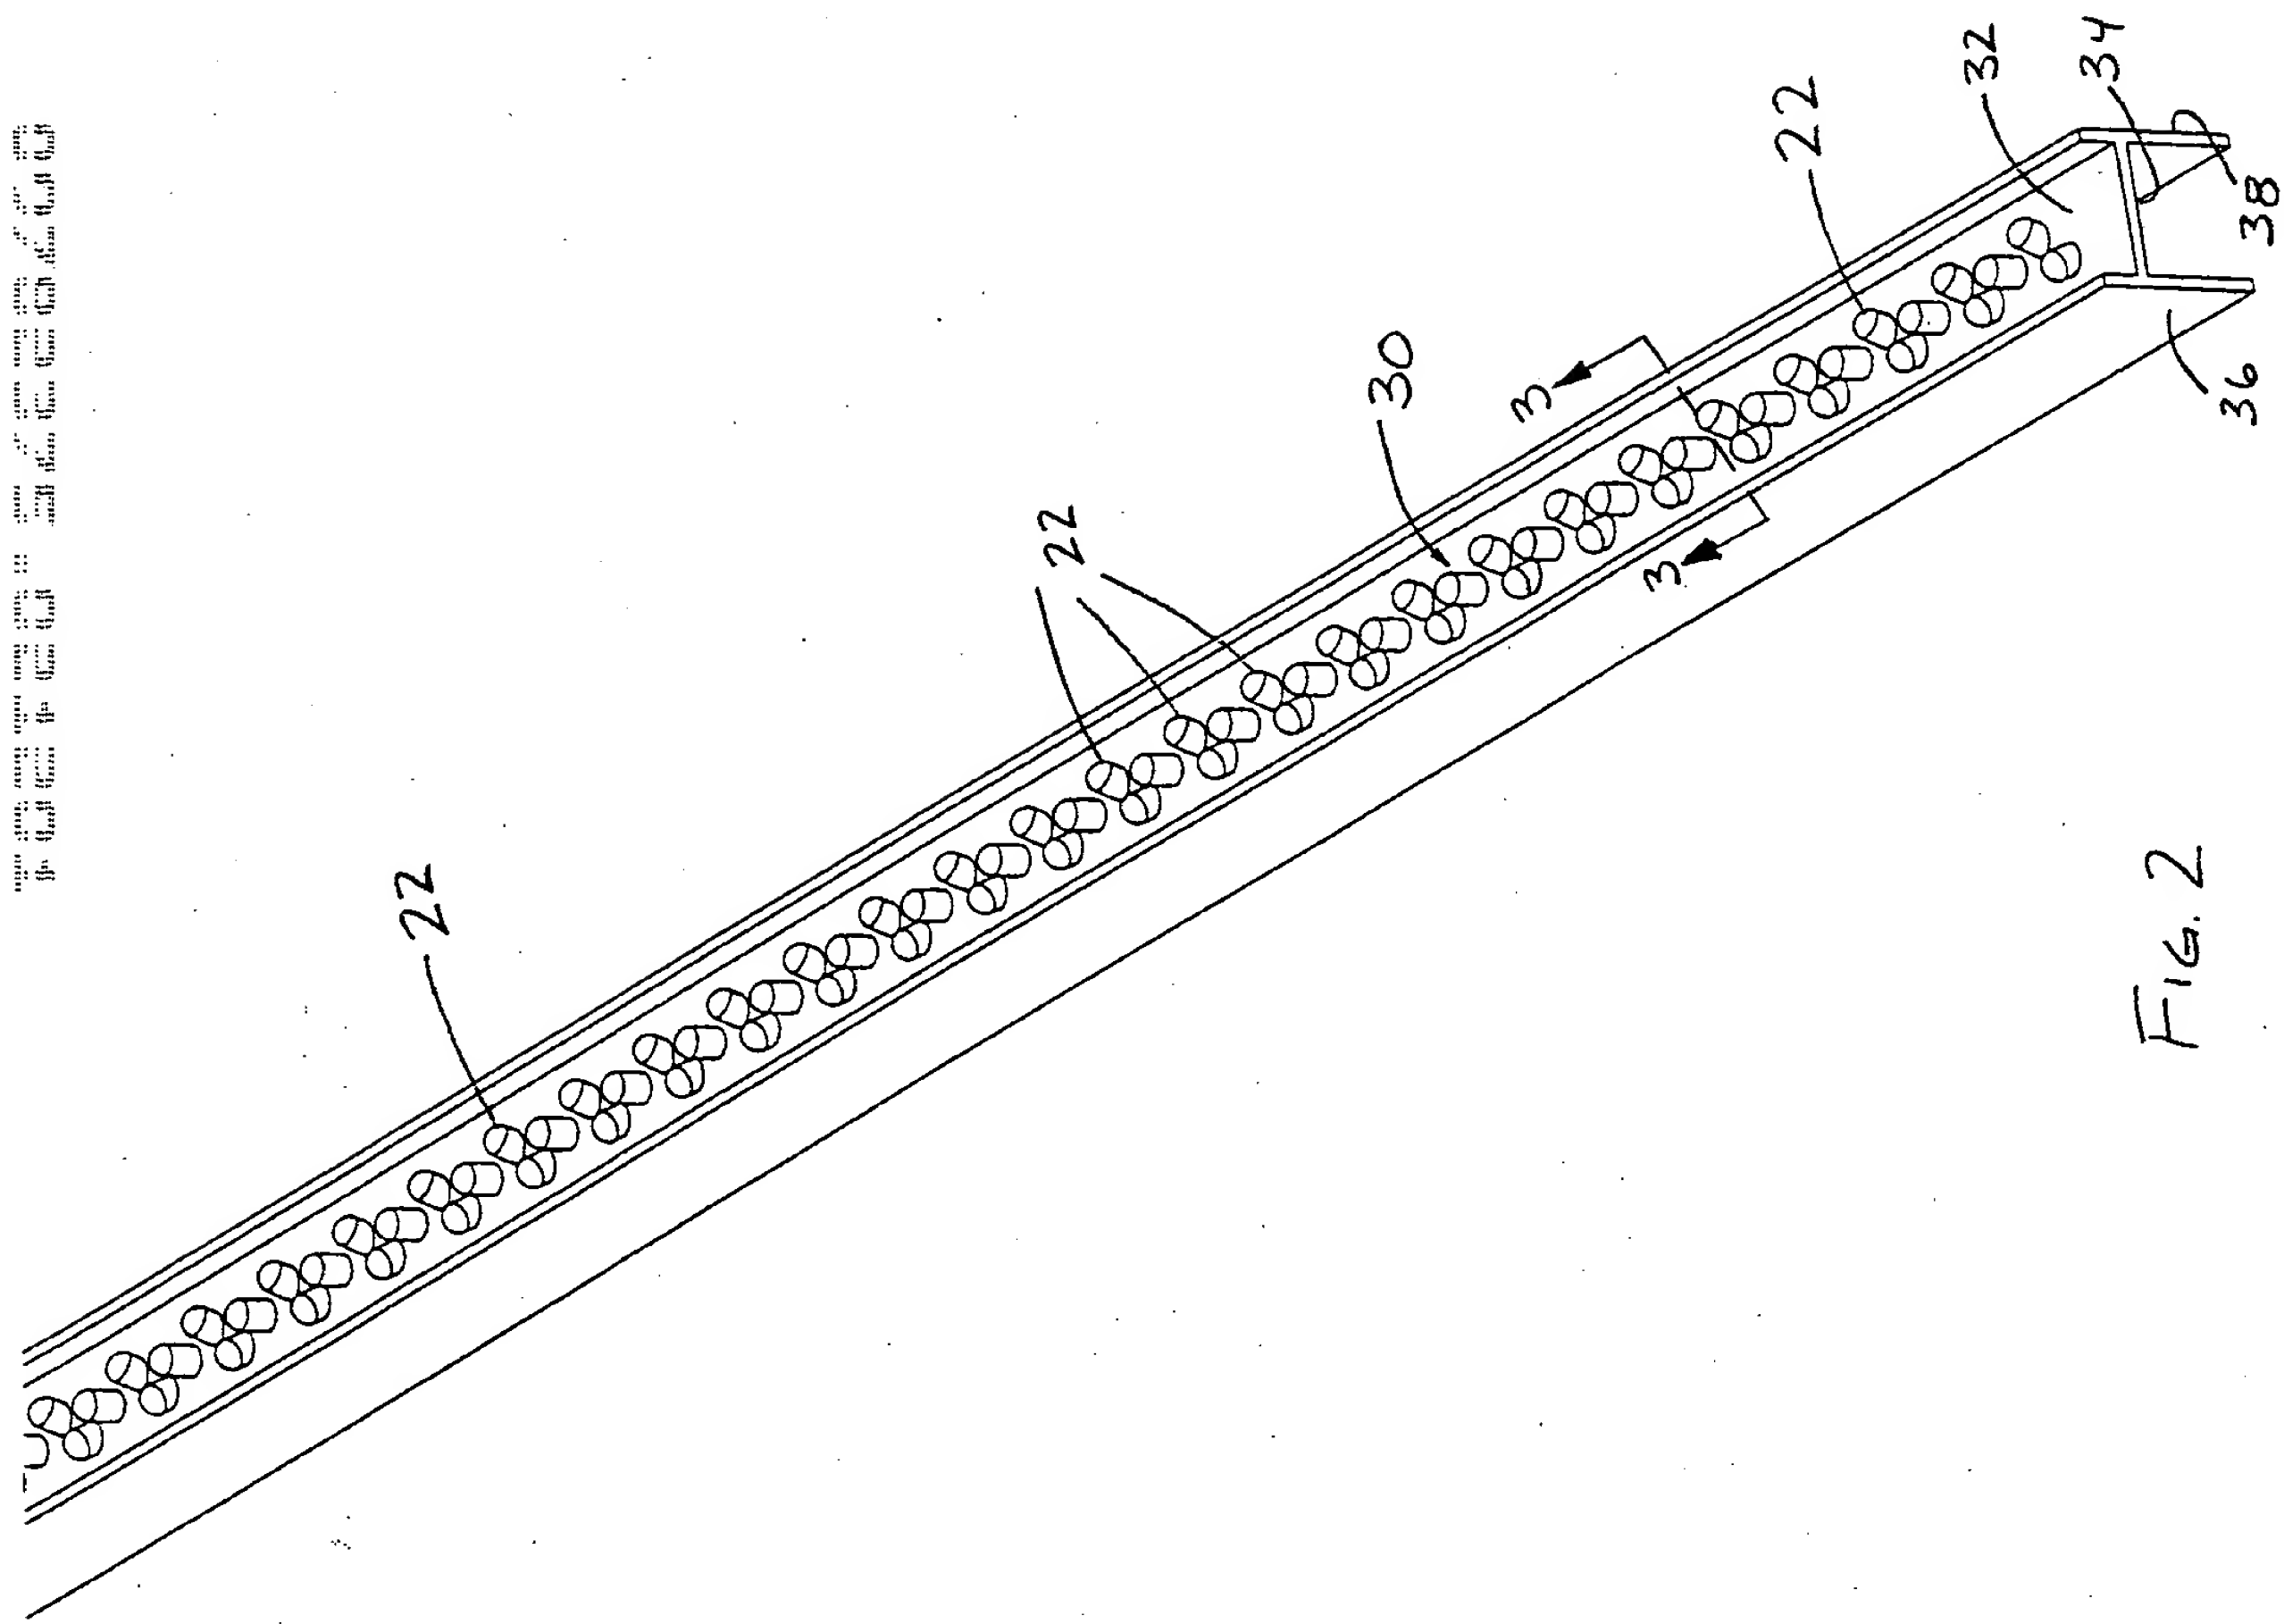


FIG. 2

FIG. 3 is a perspective view of the device in accordance with the present invention, showing the device in a closed position. The device is shown in a perspective view, and the components are labeled with reference numerals.

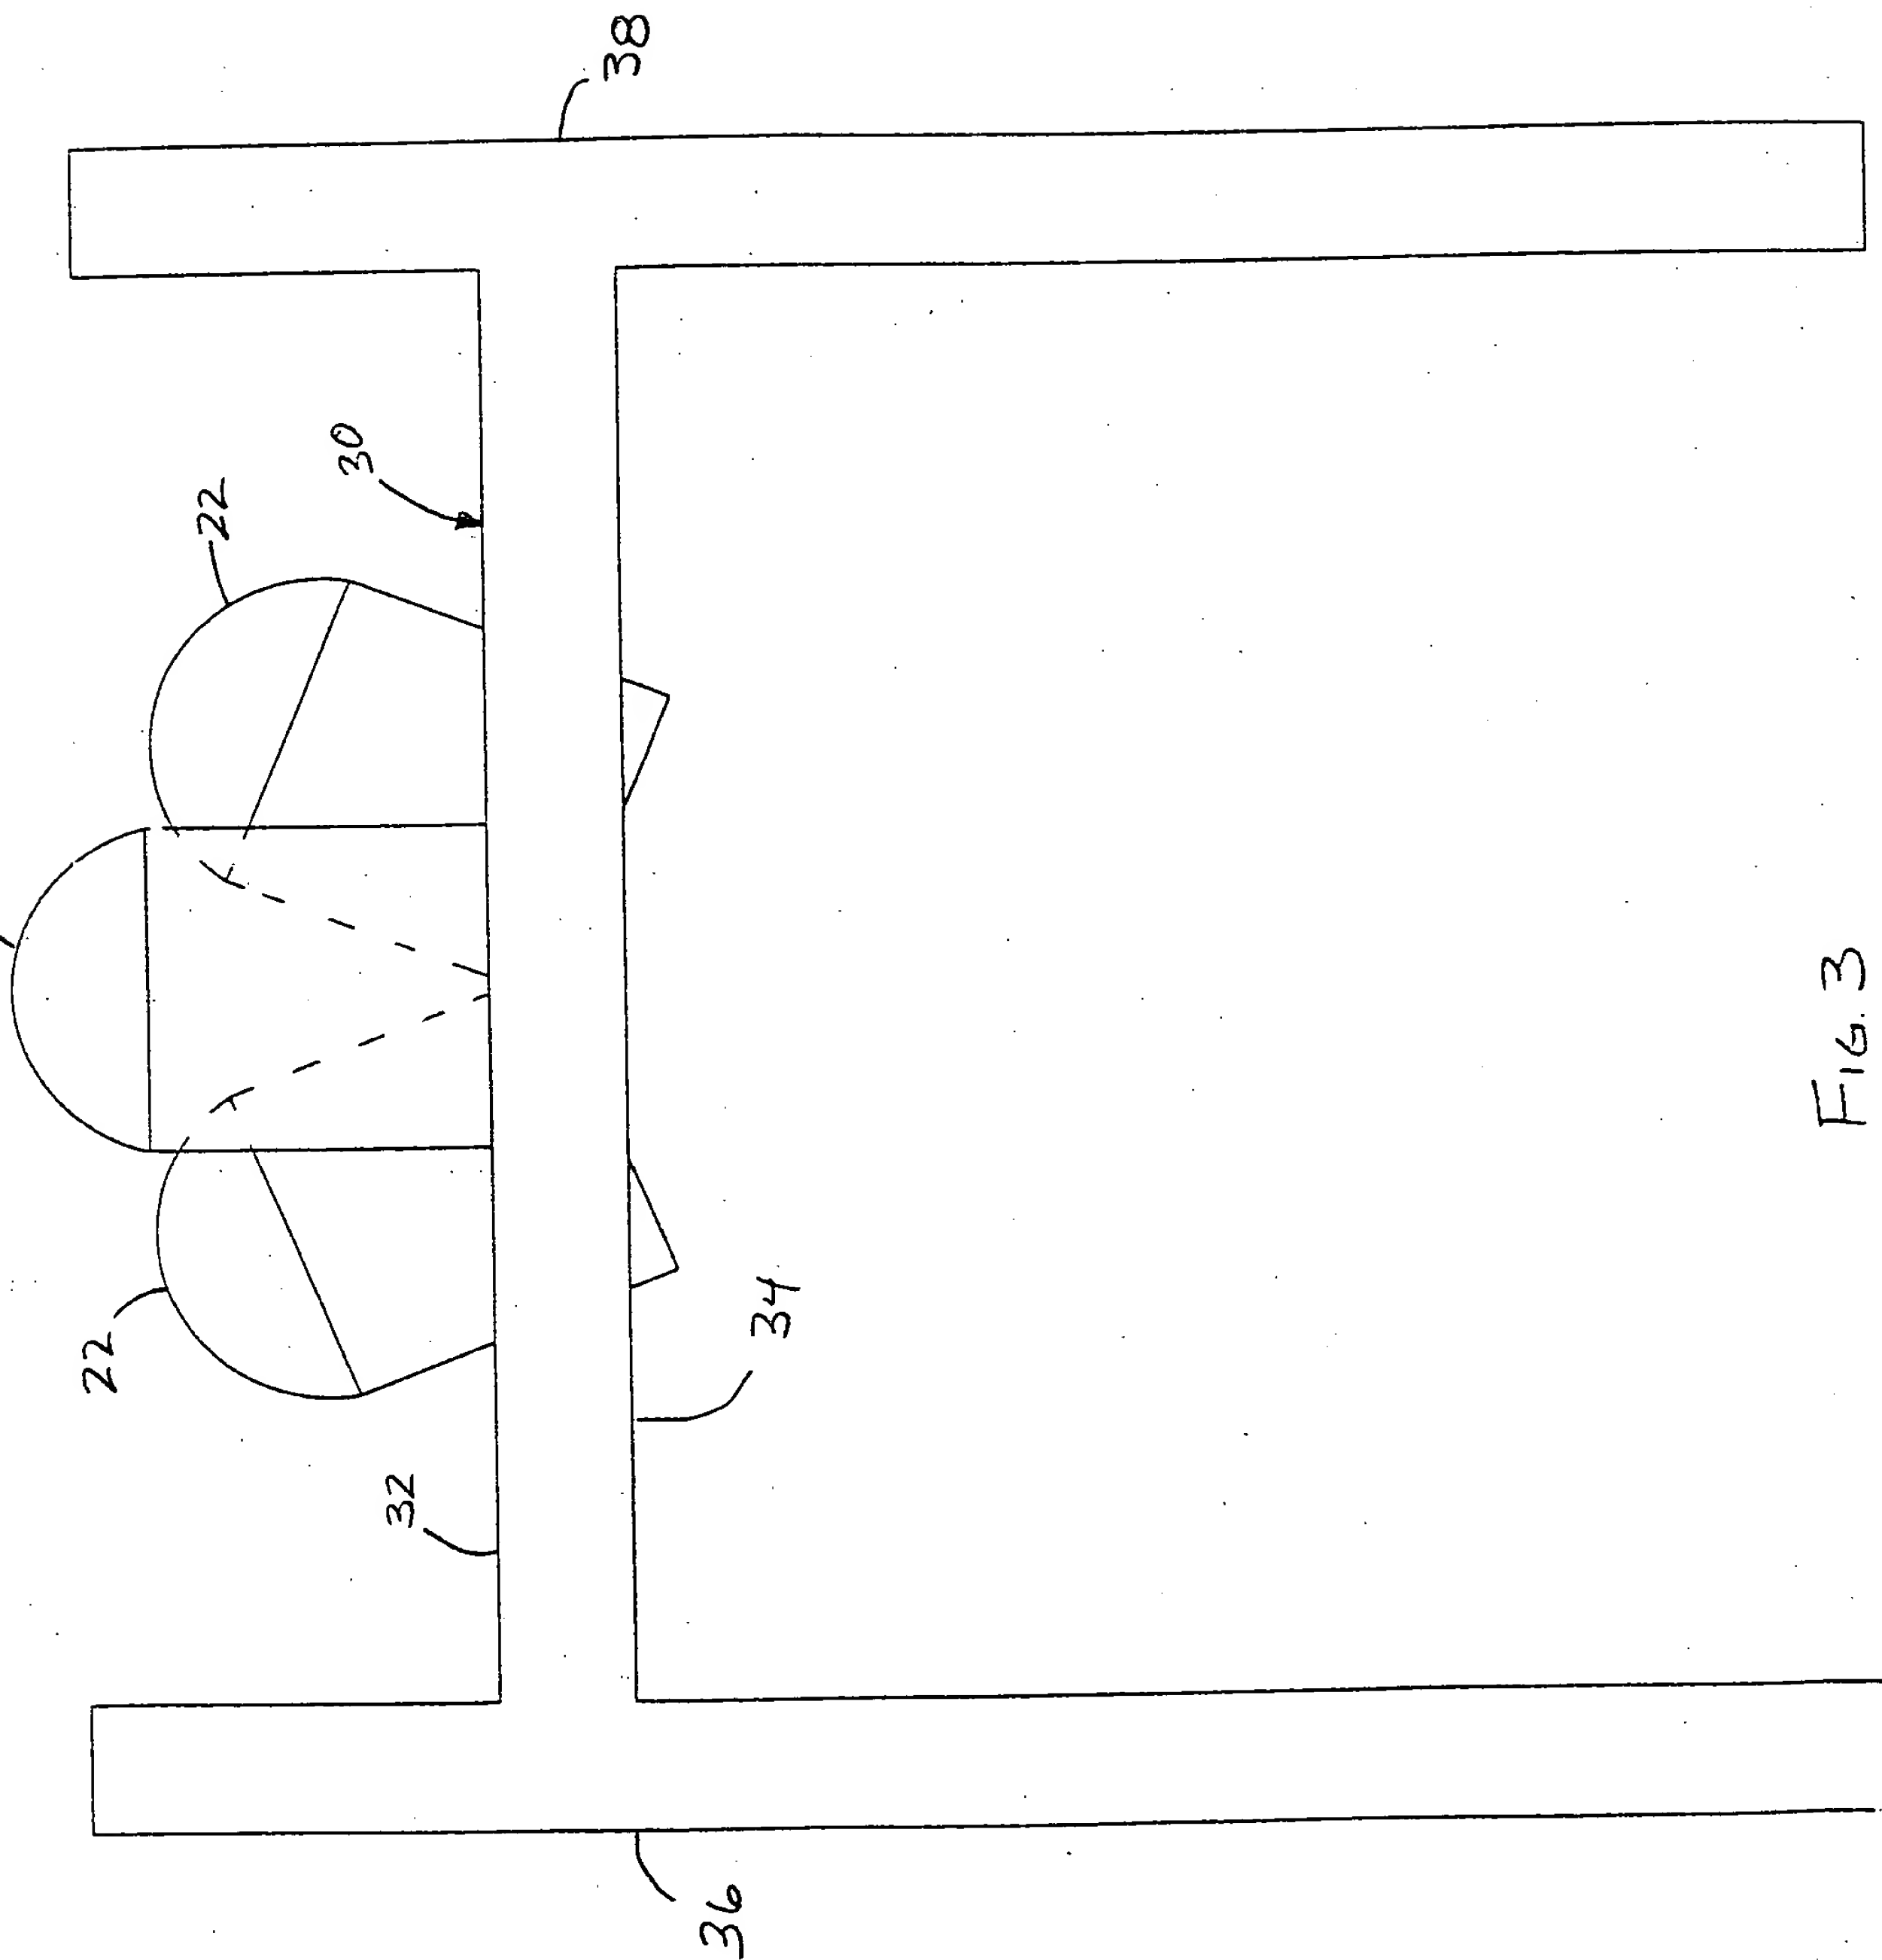


FIG. 3

FIG. 4 is a perspective view of the device 20 in an open position, showing the handle 26 and the head 40. The handle 26 is shown in a curved position, and the head 40 is shown in a position where it is open to the front of the device.

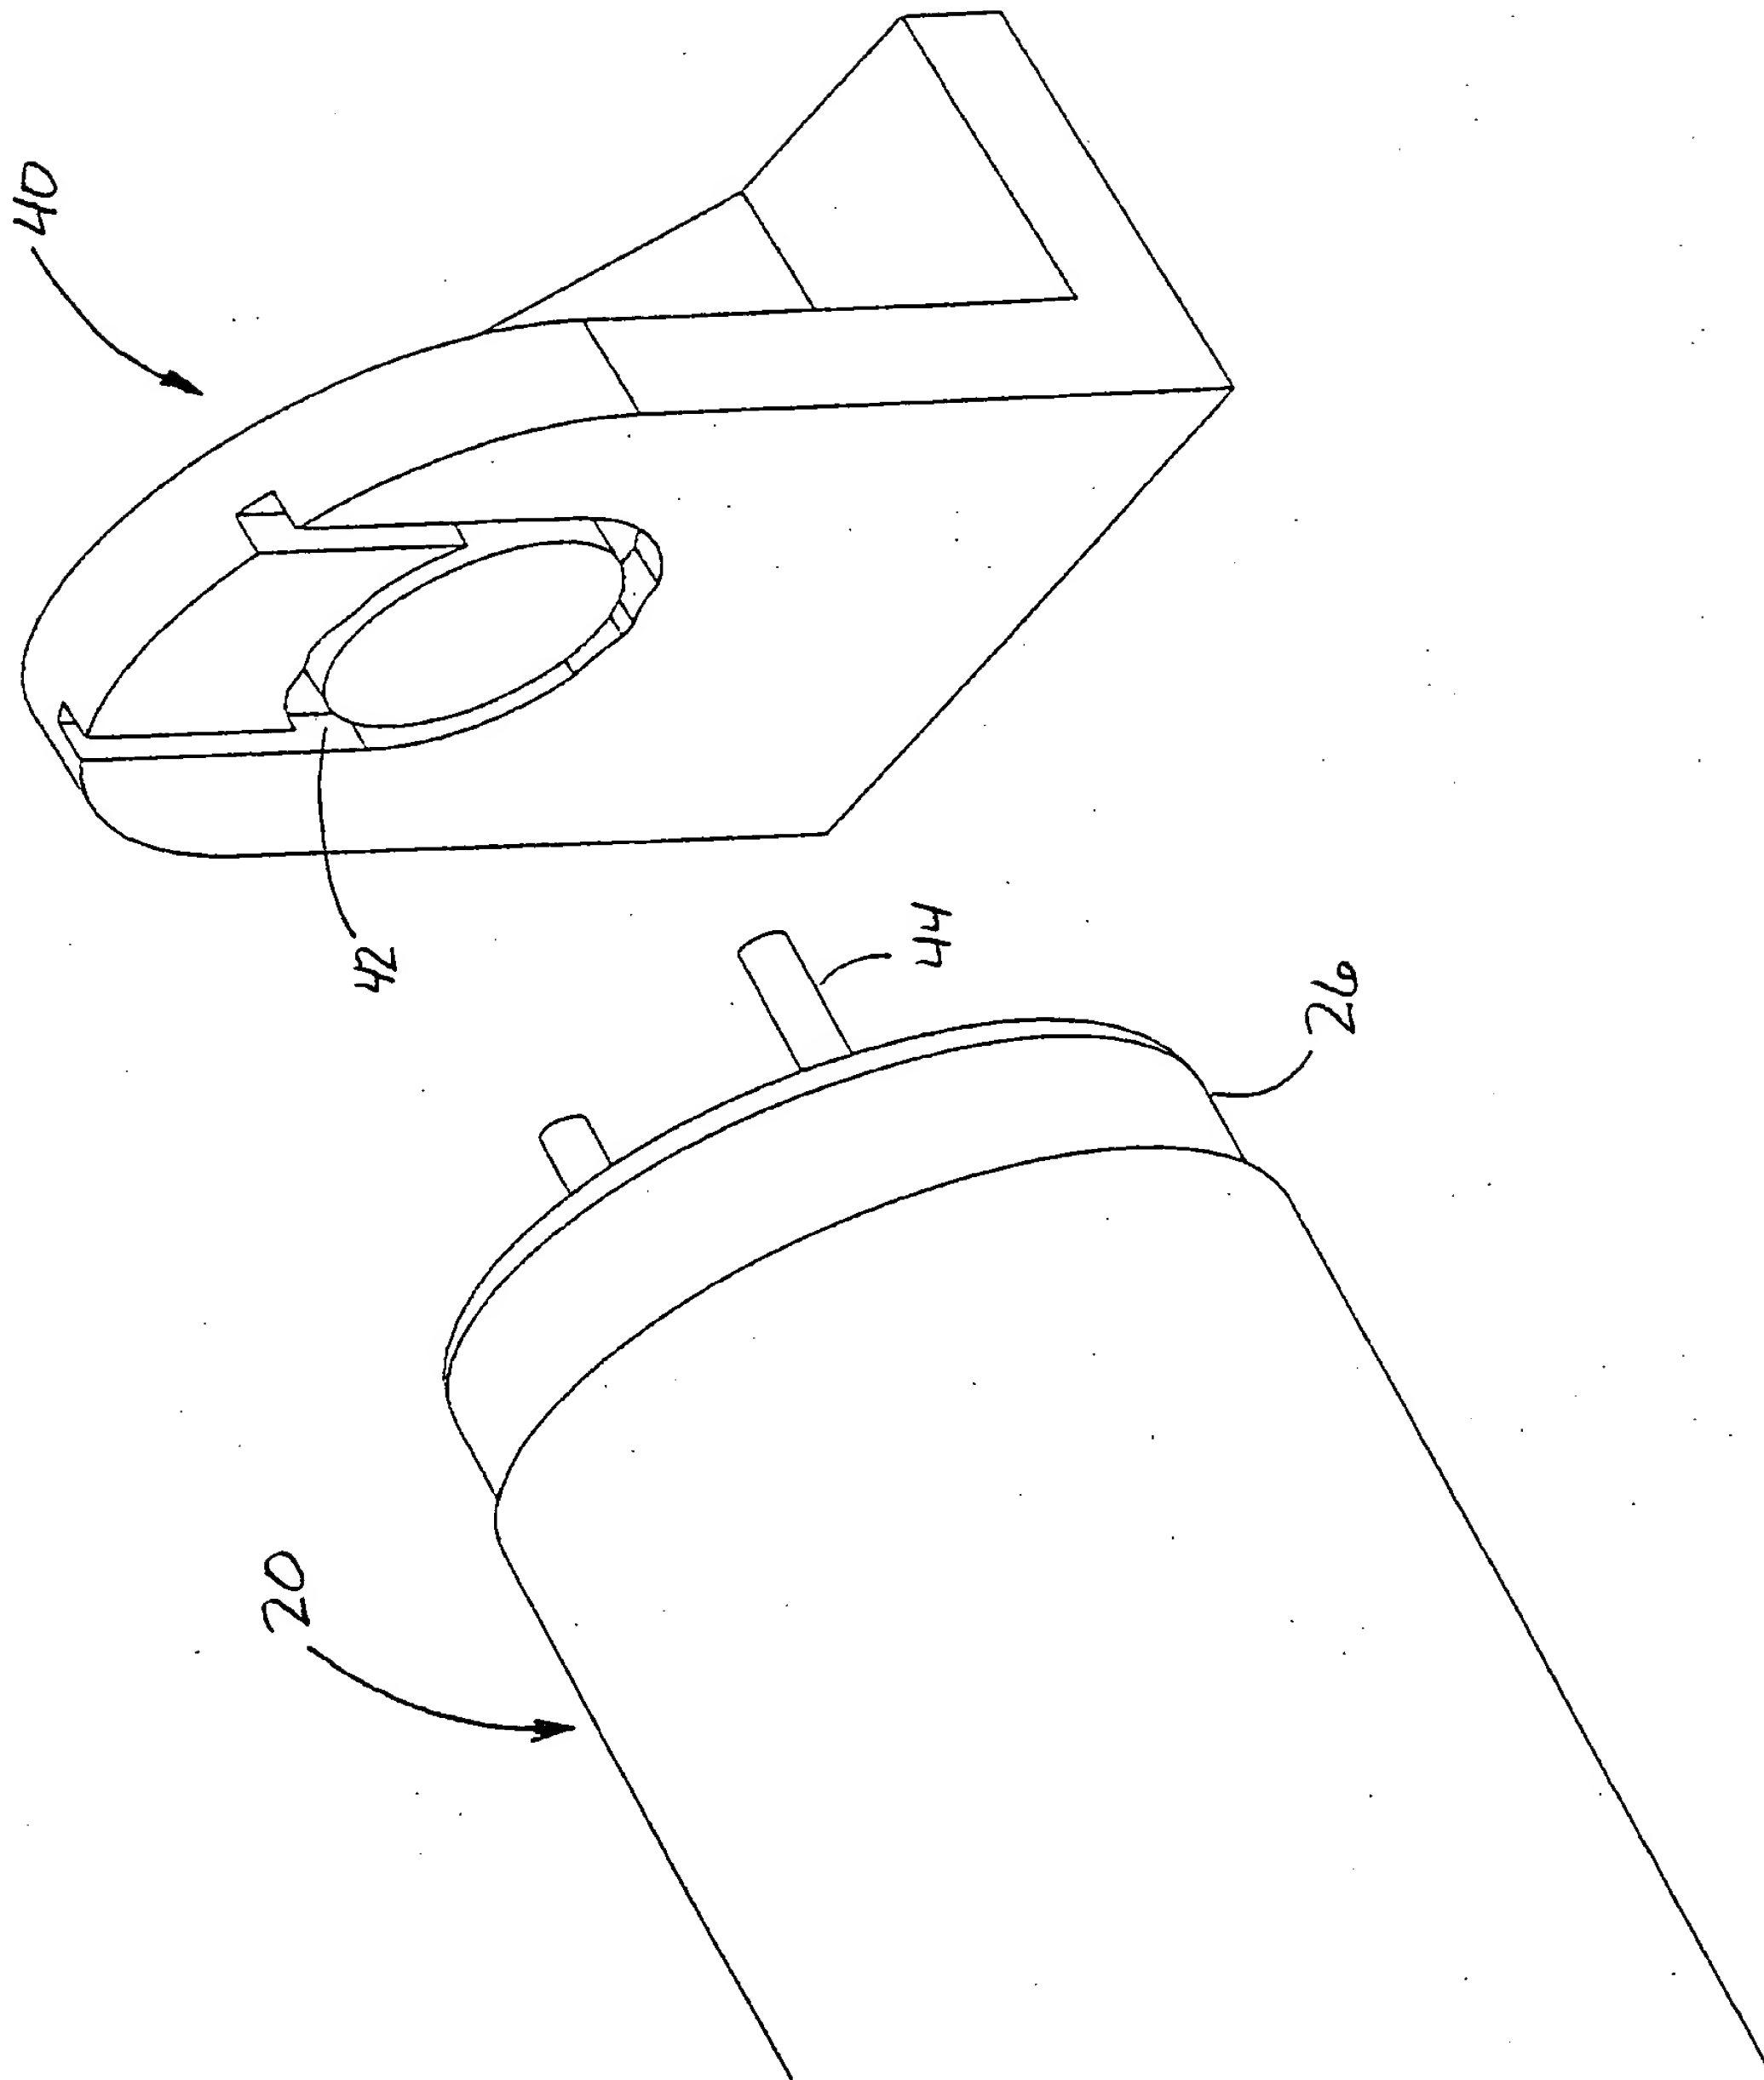


FIG. 4

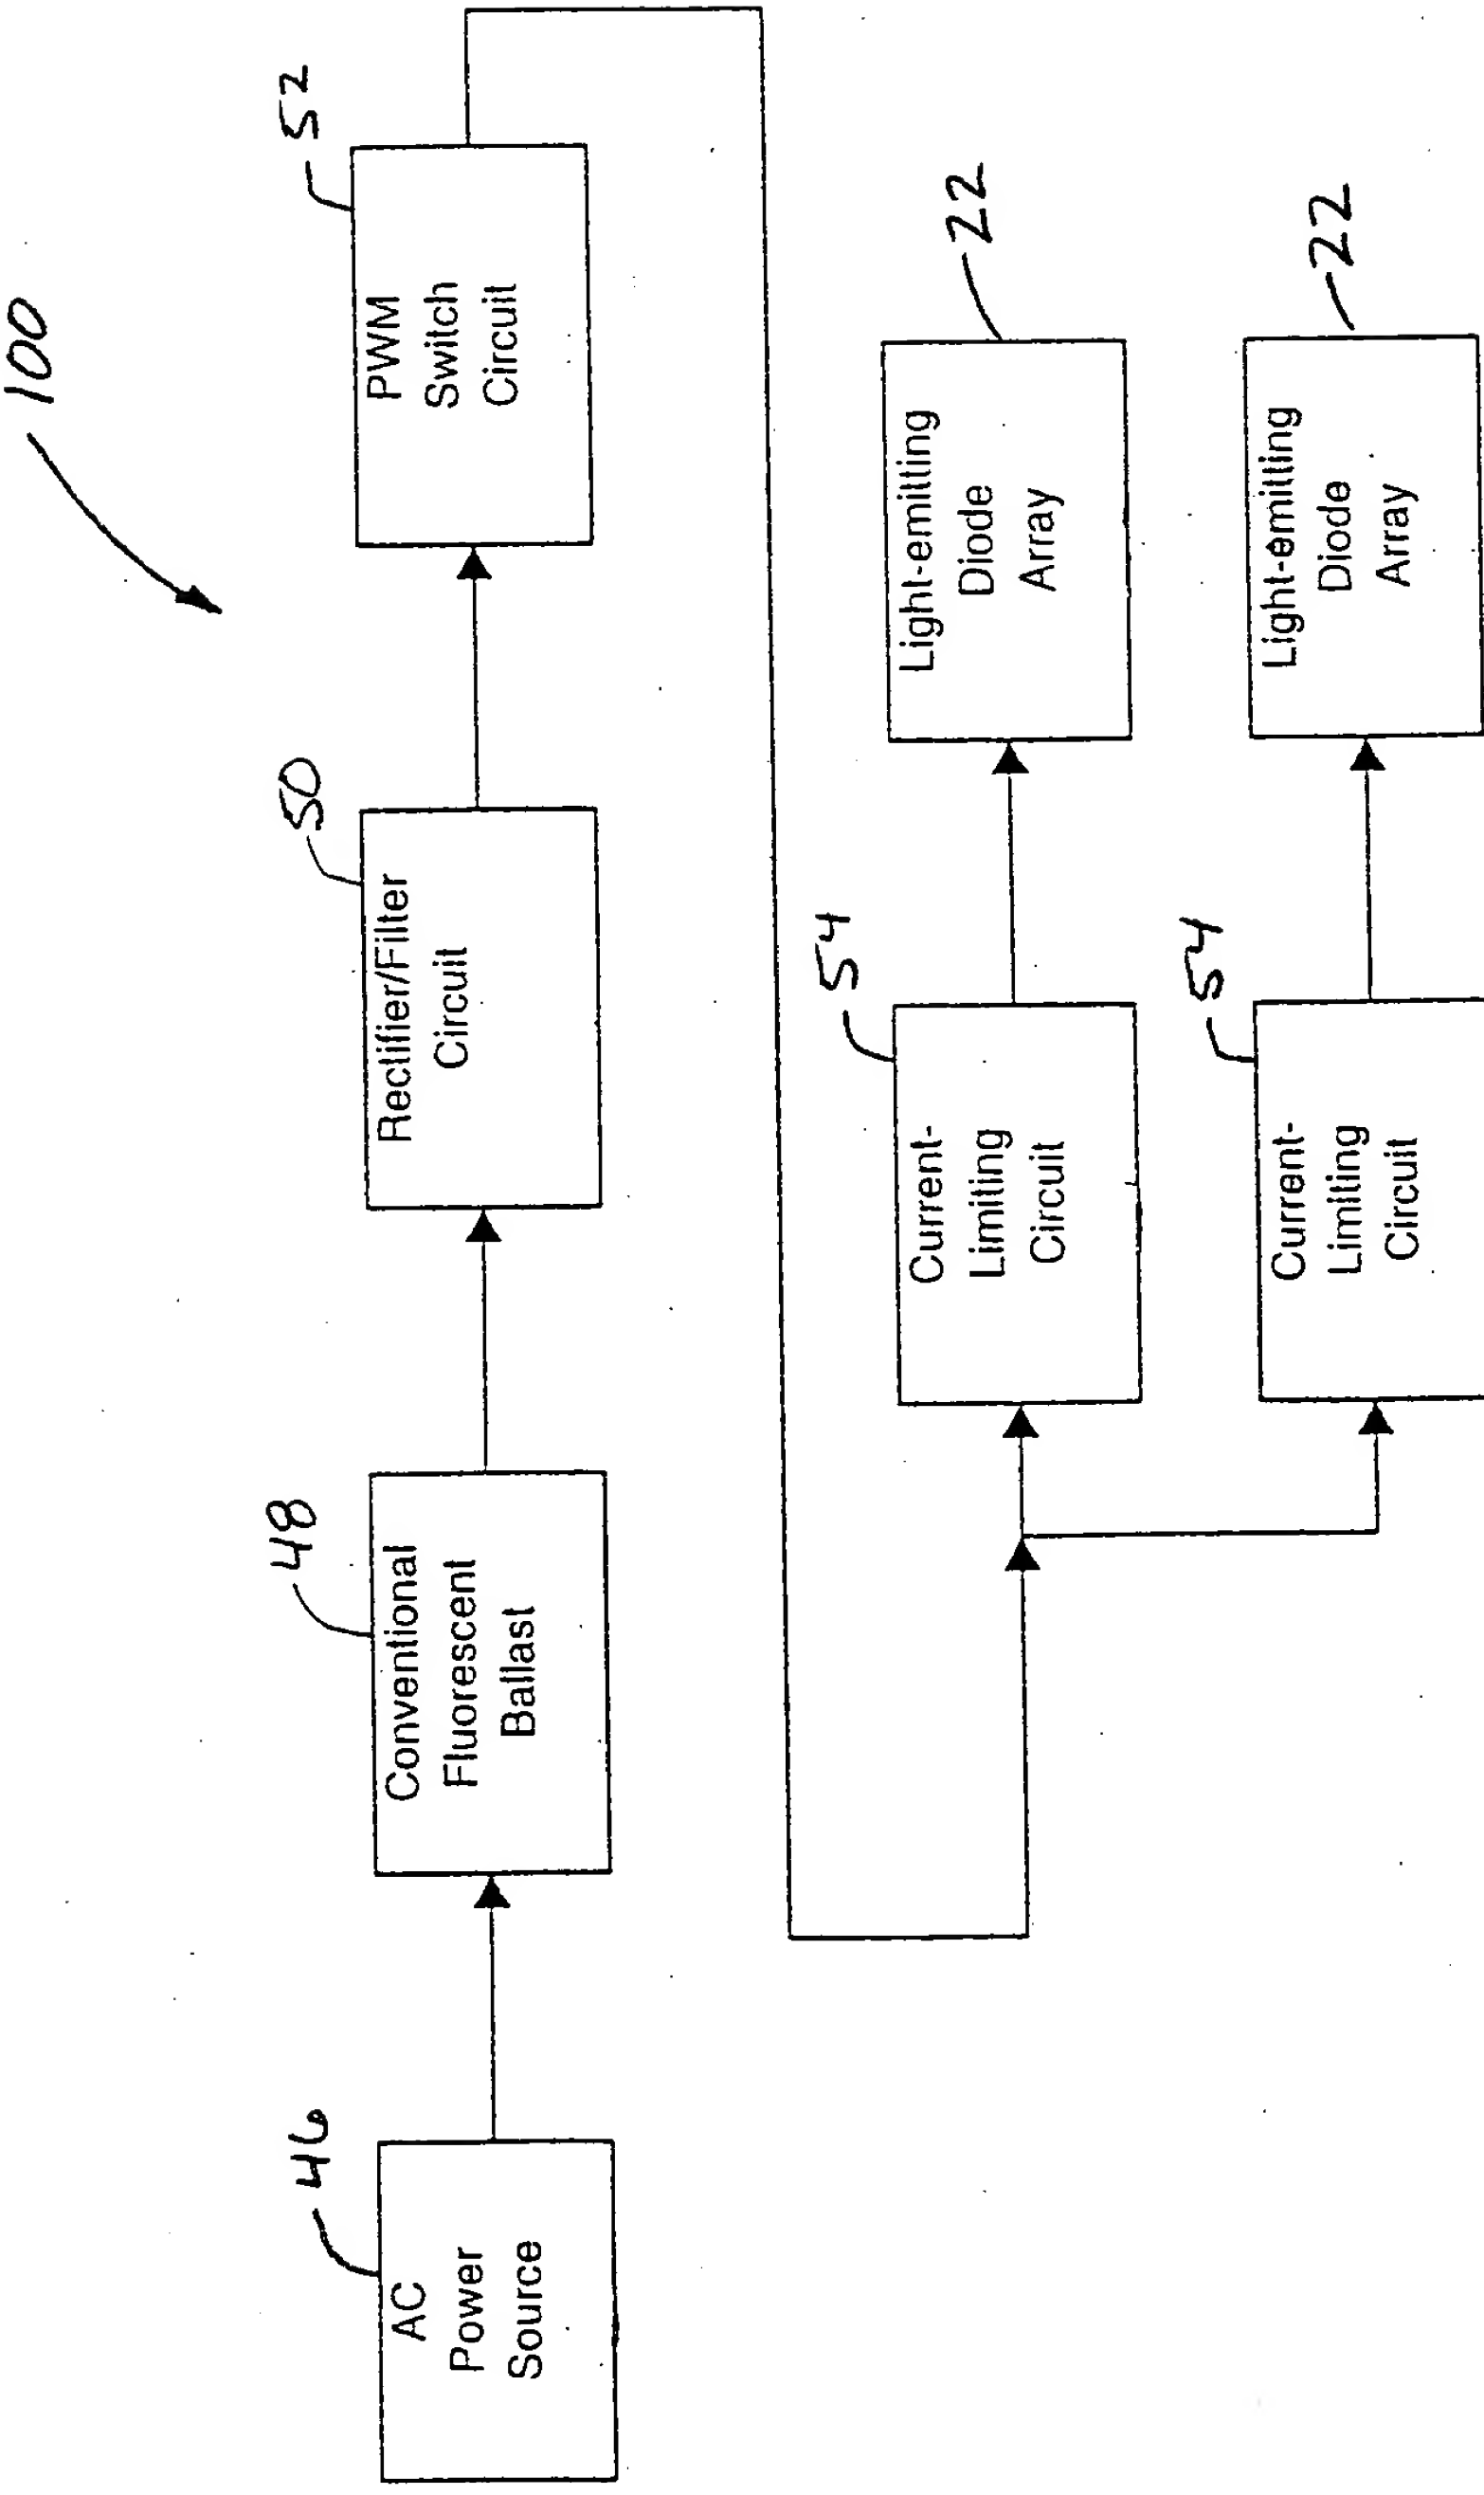


FIG. 5

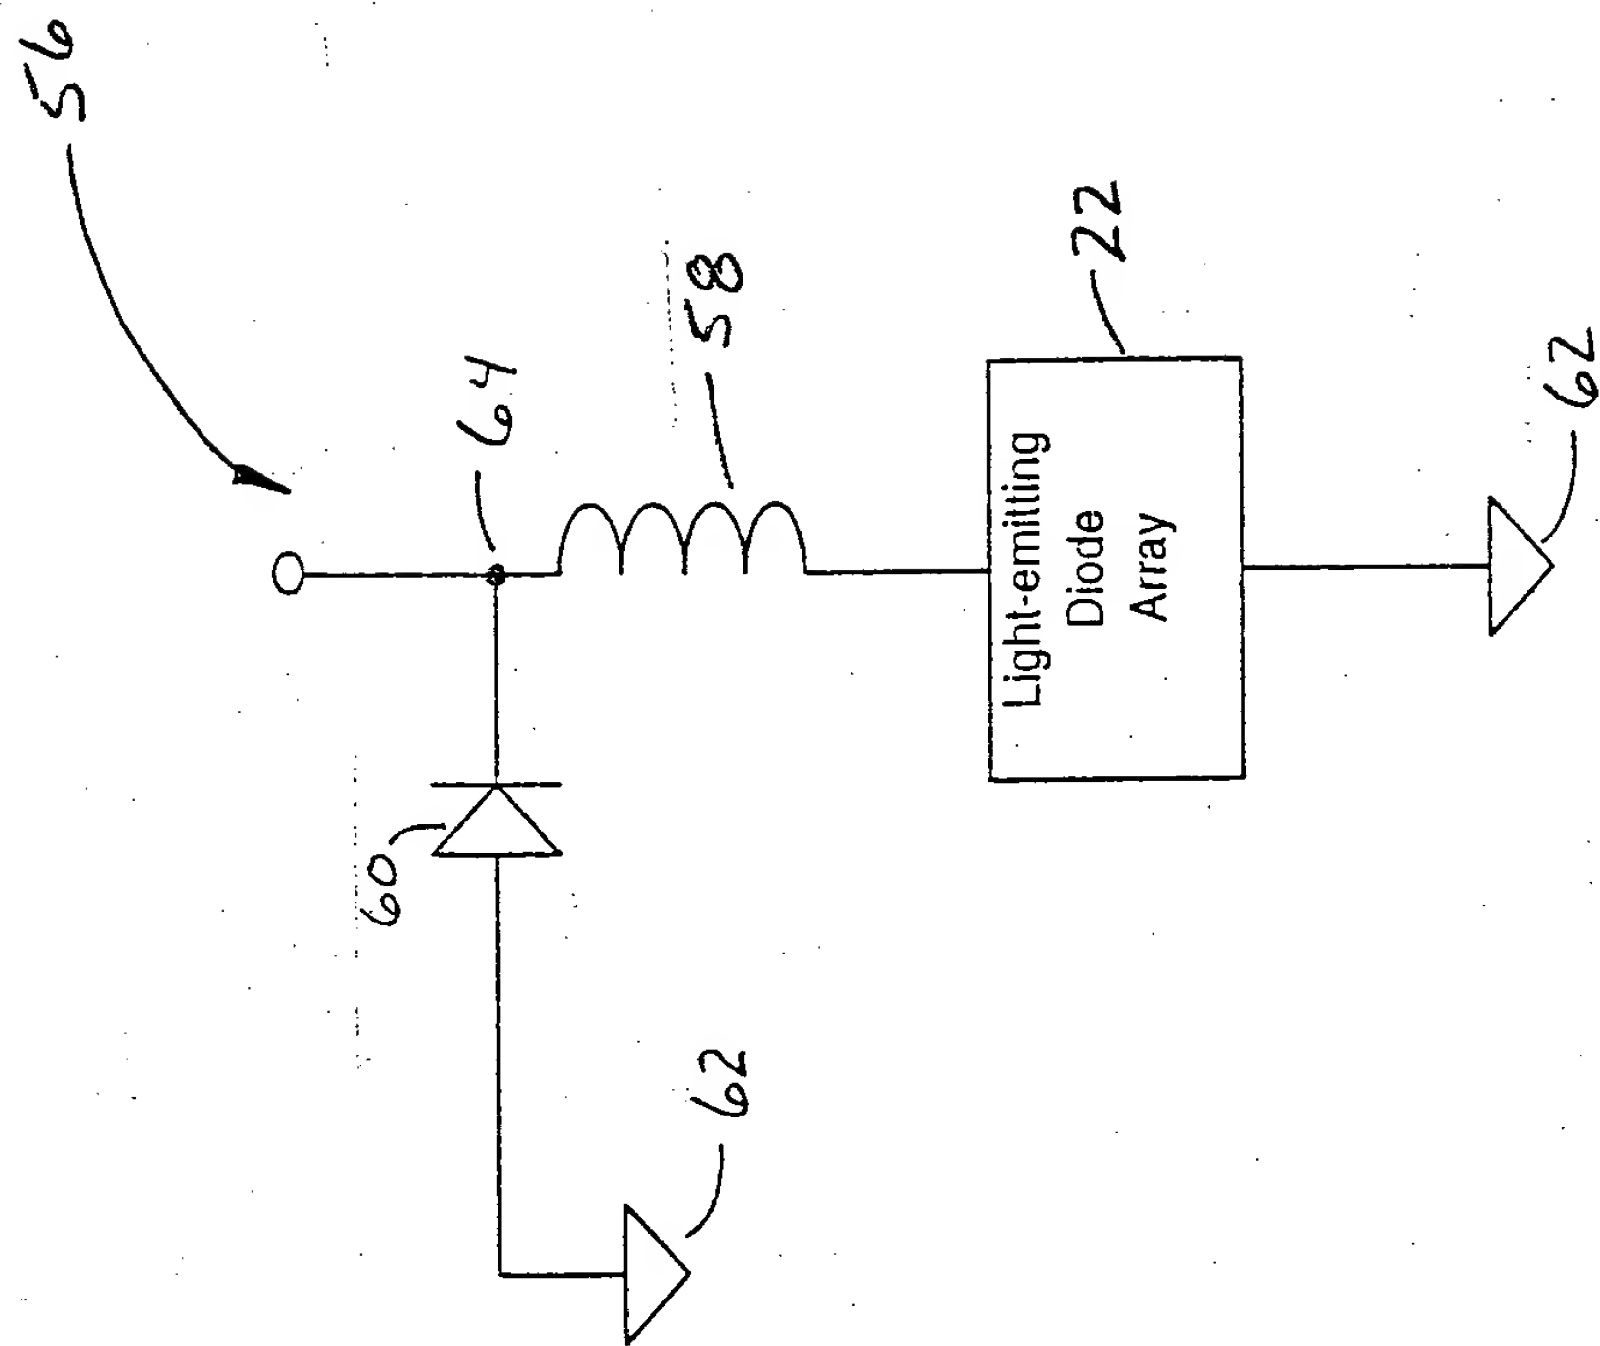


FIG. 6

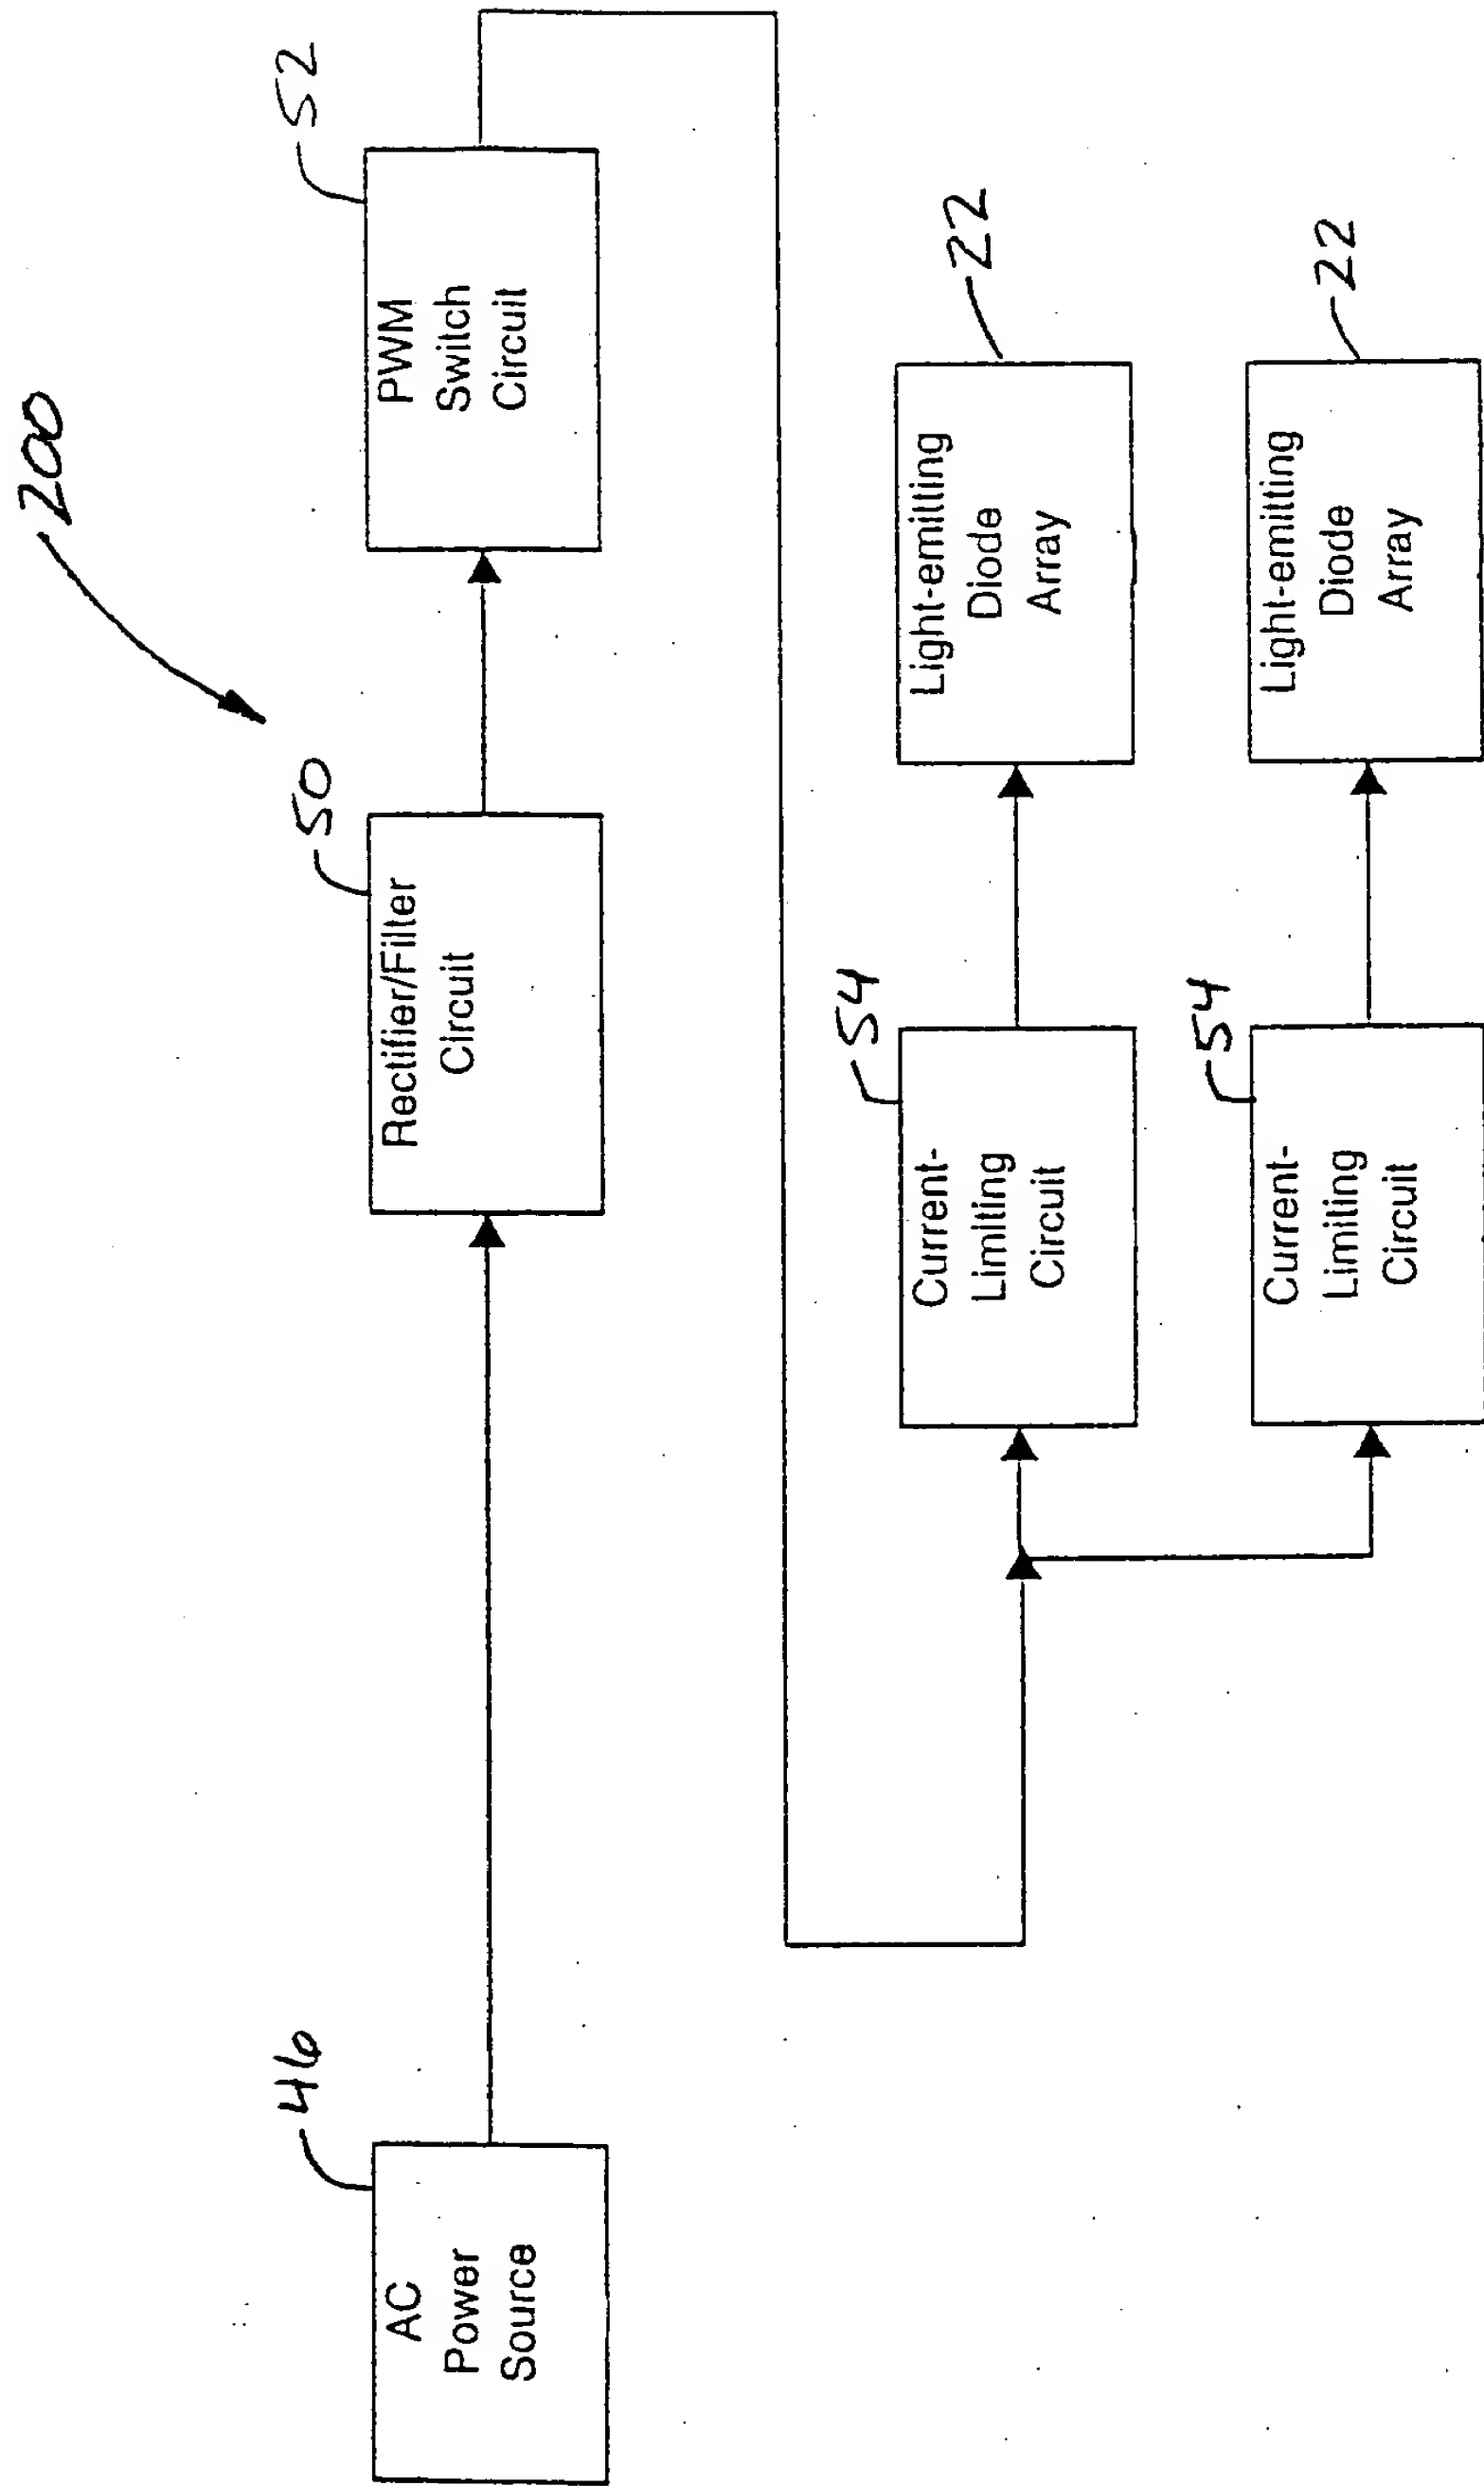


FIG. 7



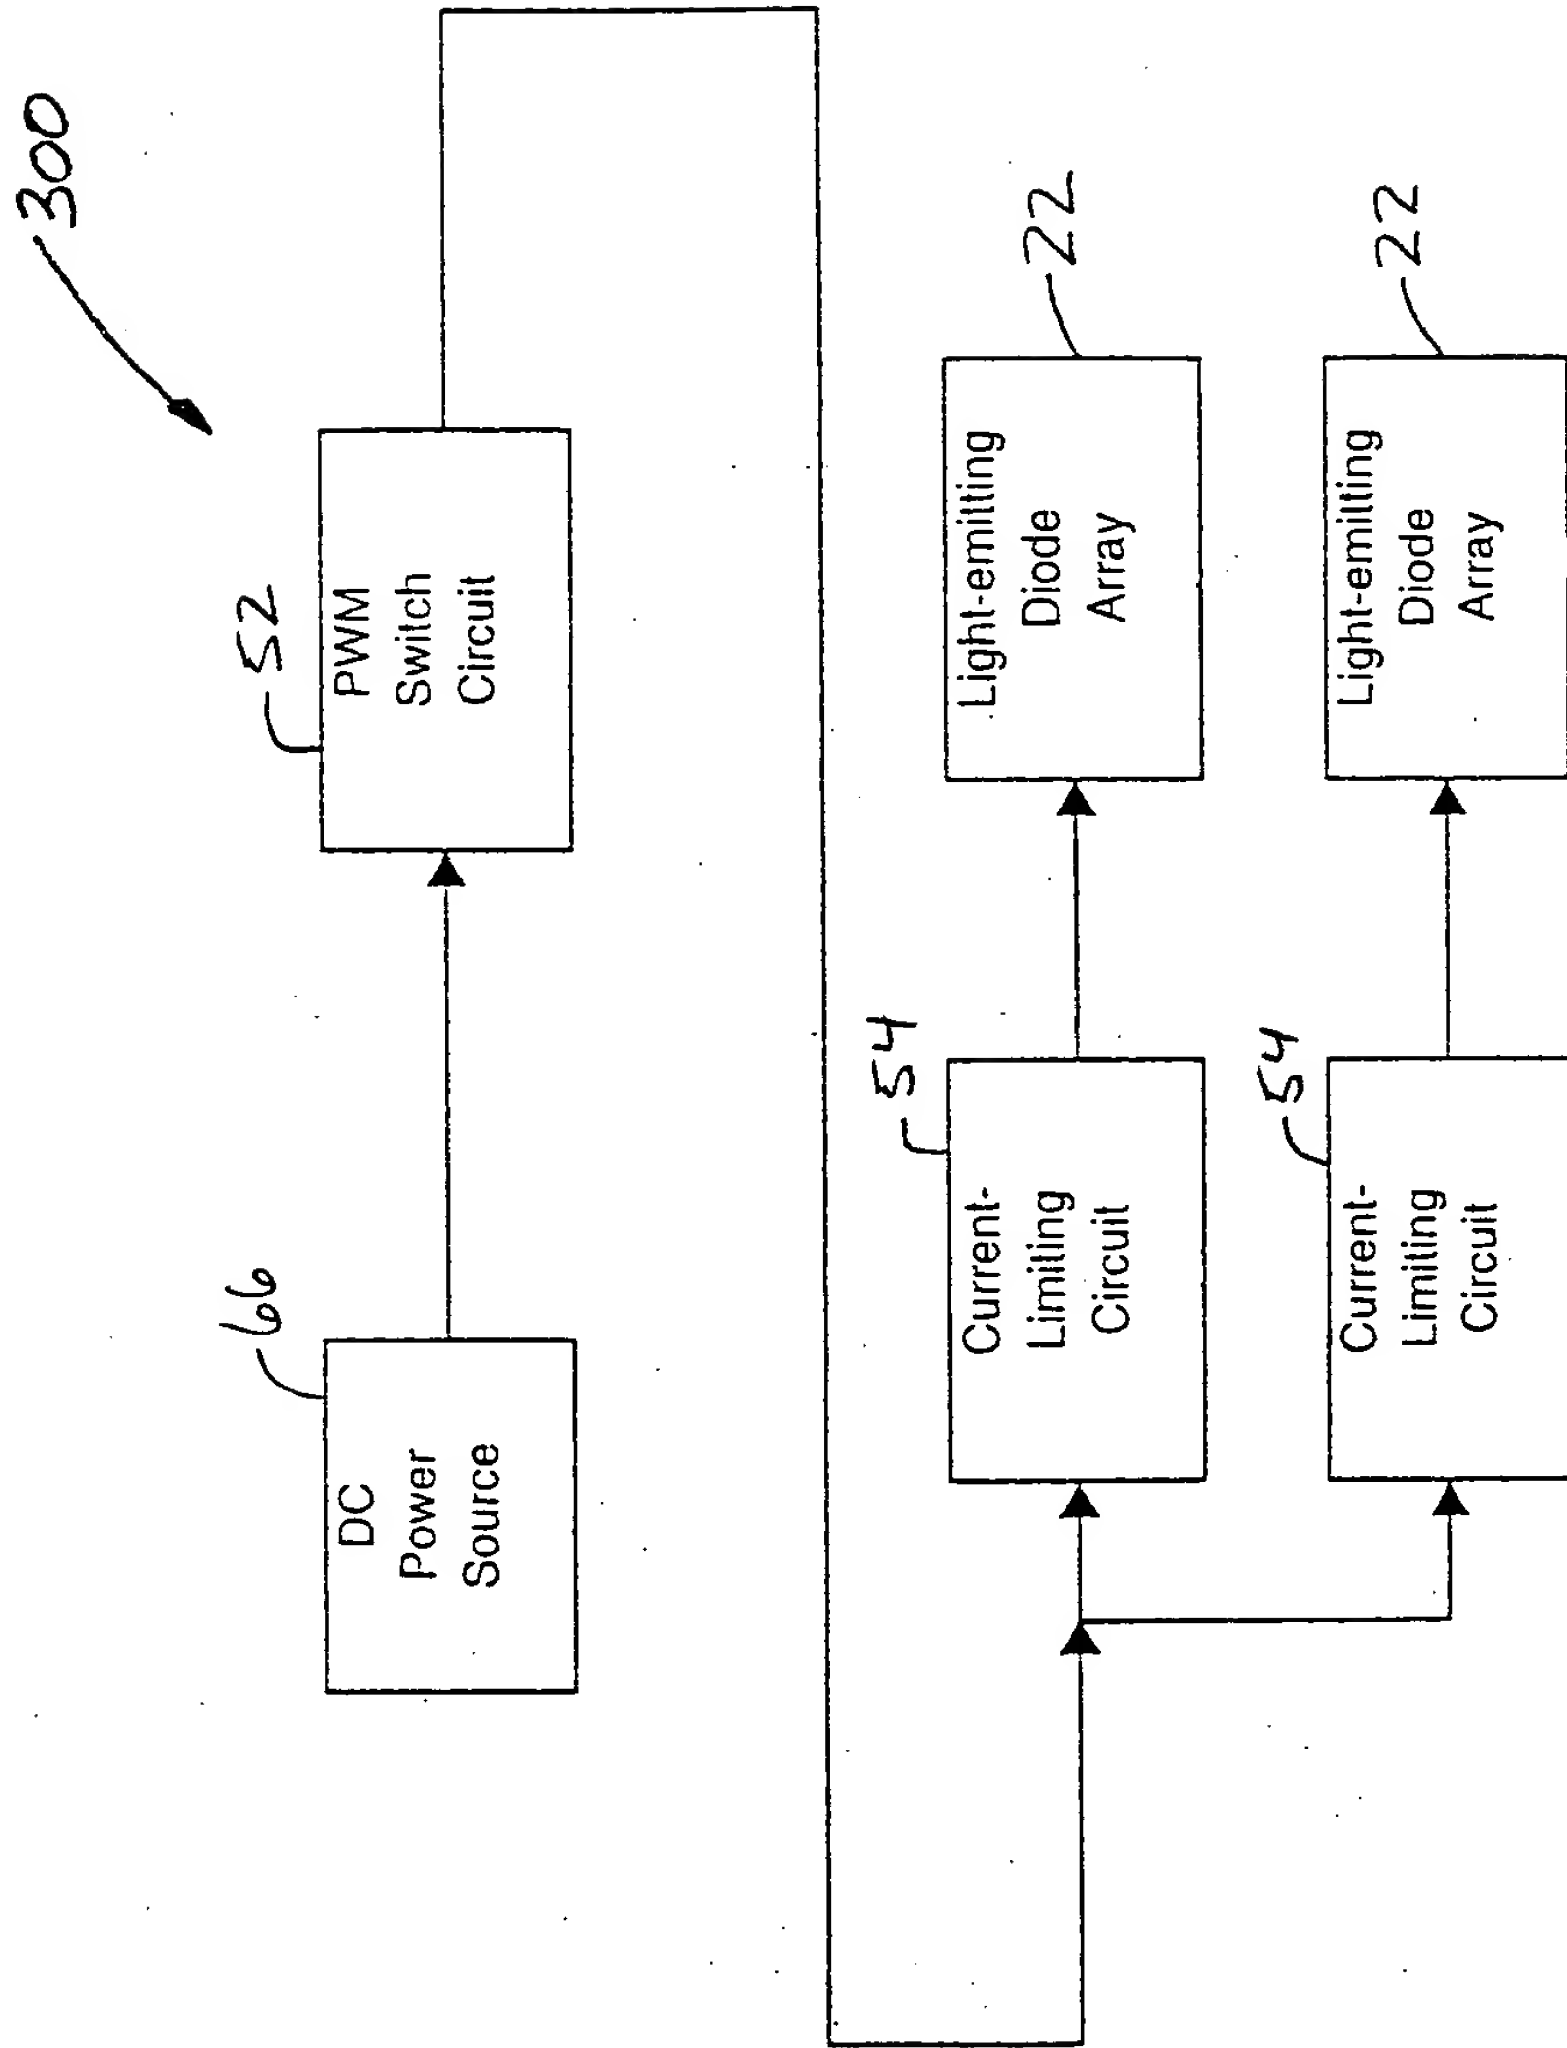


Fig. 8

FIG. 9 is a perspective view of the device 10 in a closed position, showing the handle 20 and the body 40. The handle 20 is shown in a curved position, and the body 40 is shown in a rectangular position. The device 10 is shown in a perspective view, and the handle 20 is shown in a curved position. The body 40 is shown in a rectangular position. The device 10 is shown in a perspective view, and the handle 20 is shown in a curved position. The body 40 is shown in a rectangular position.

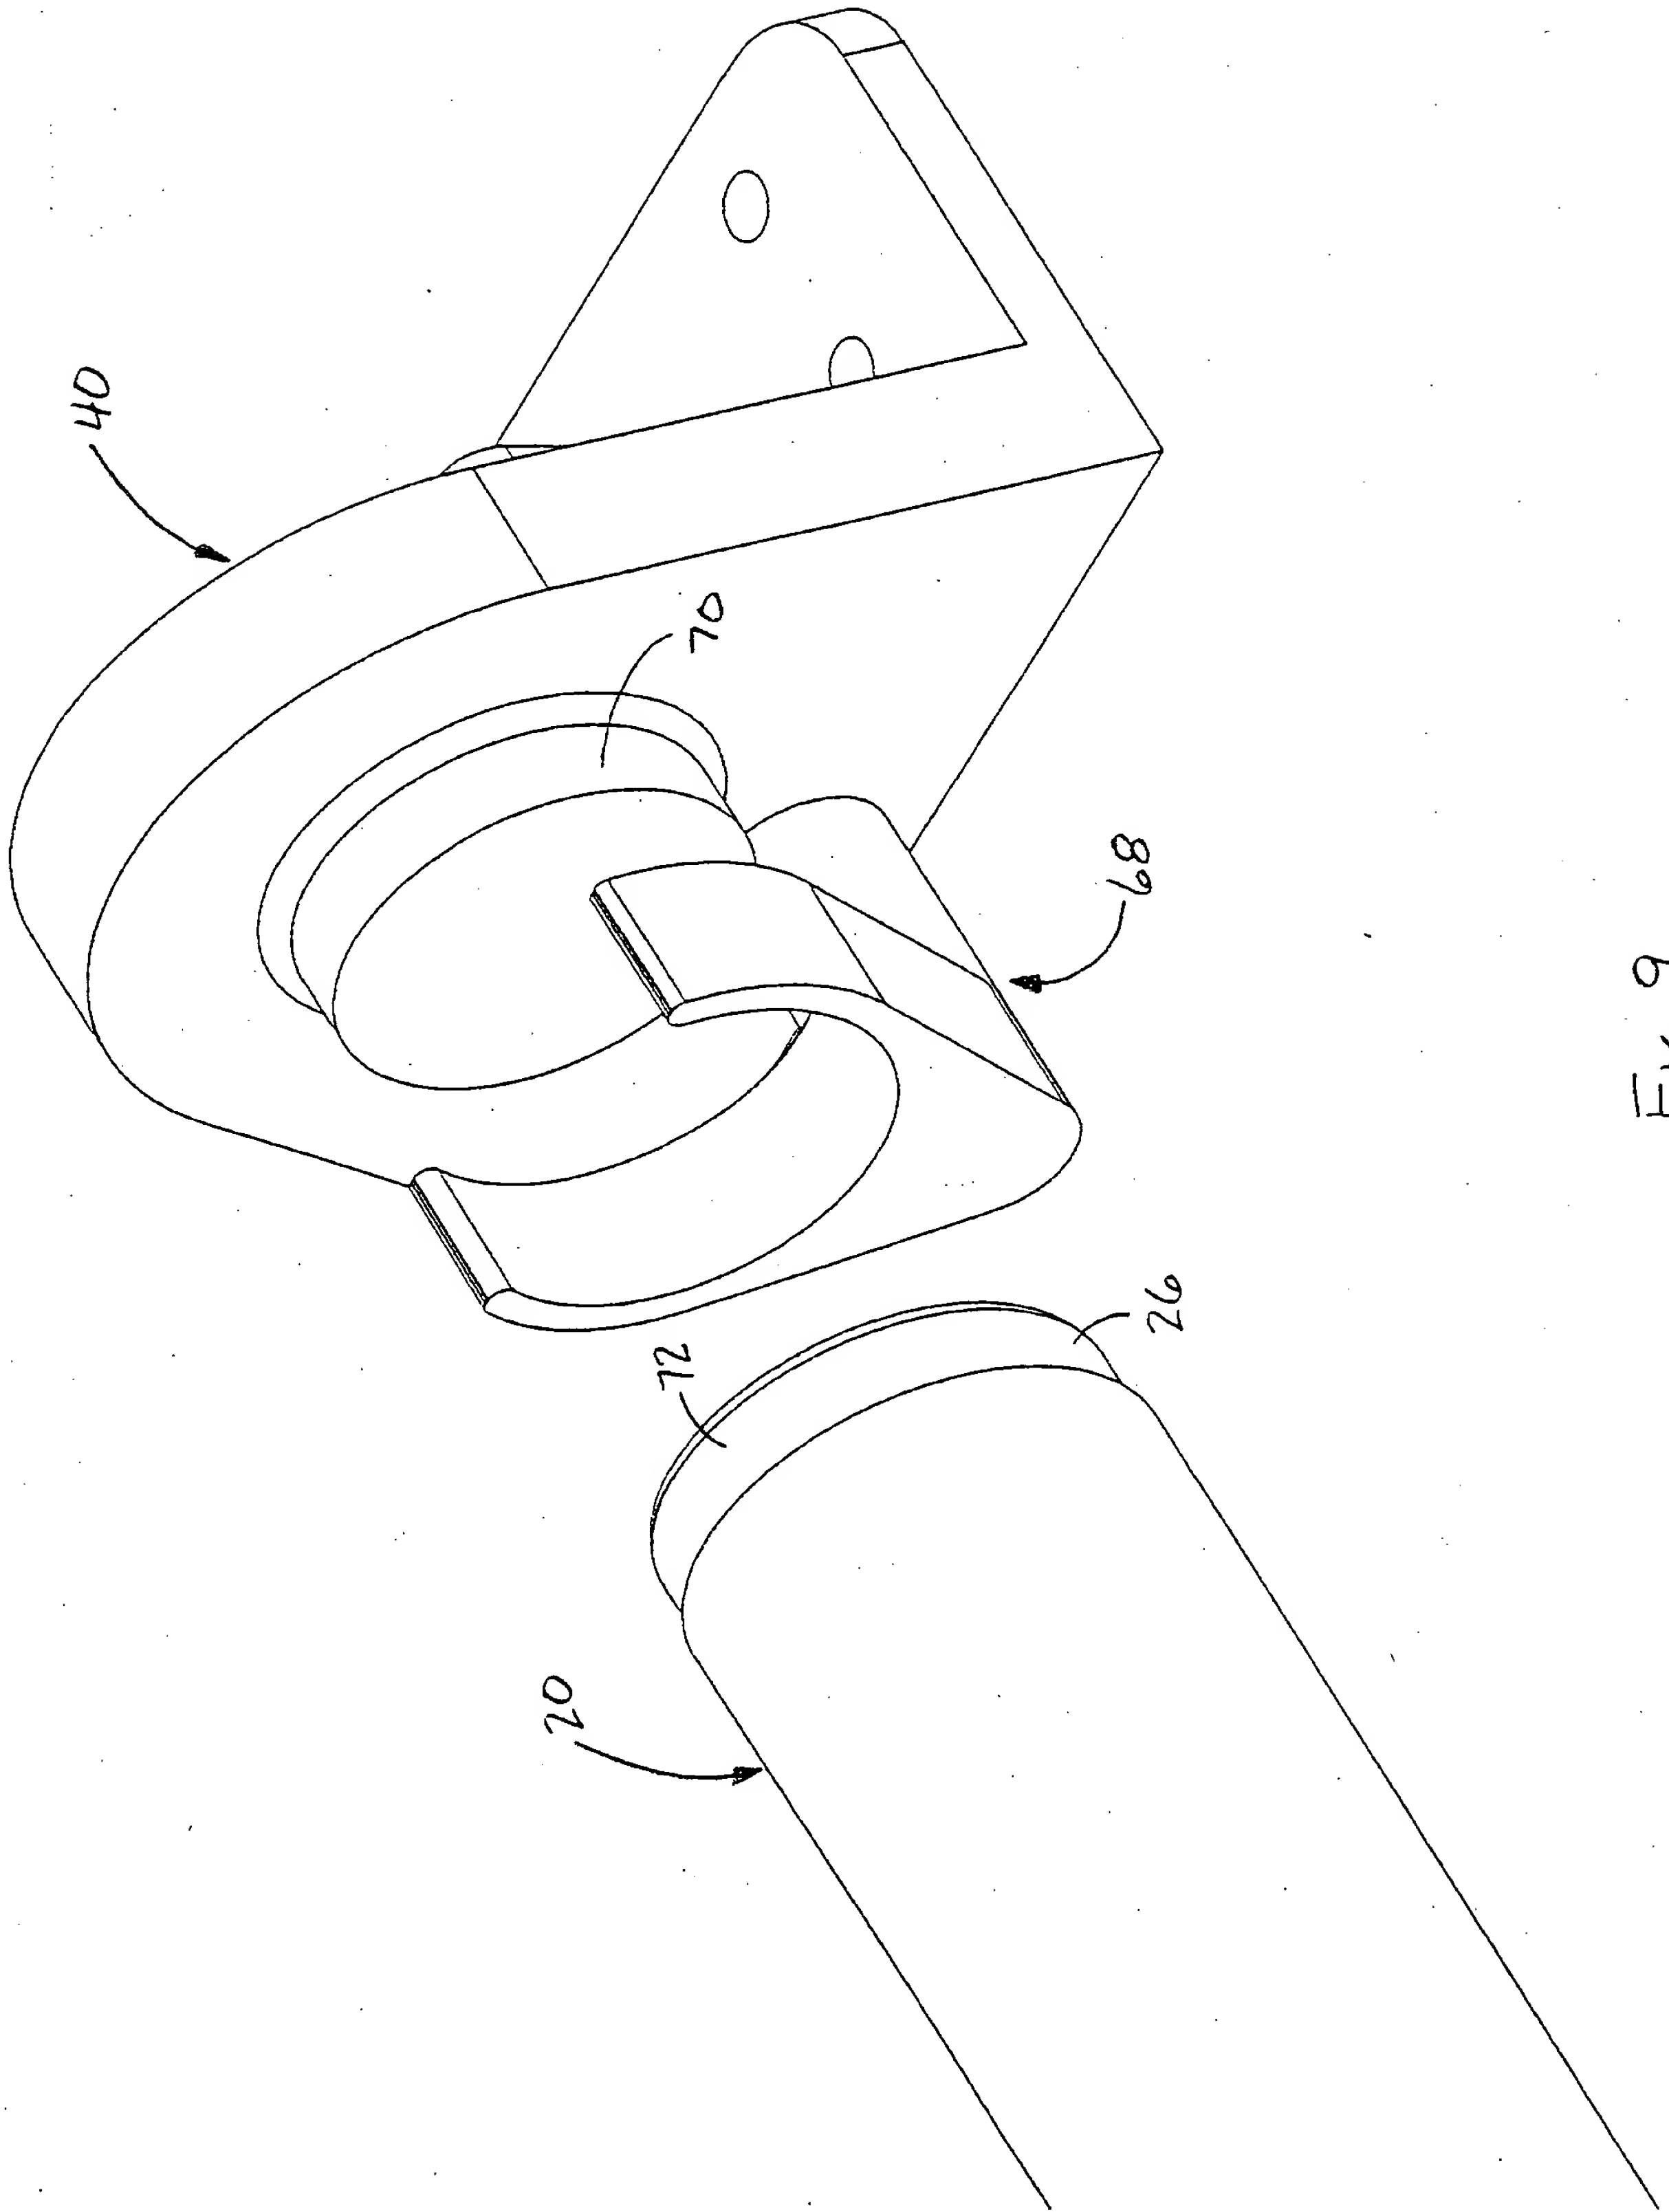


FIG. 9

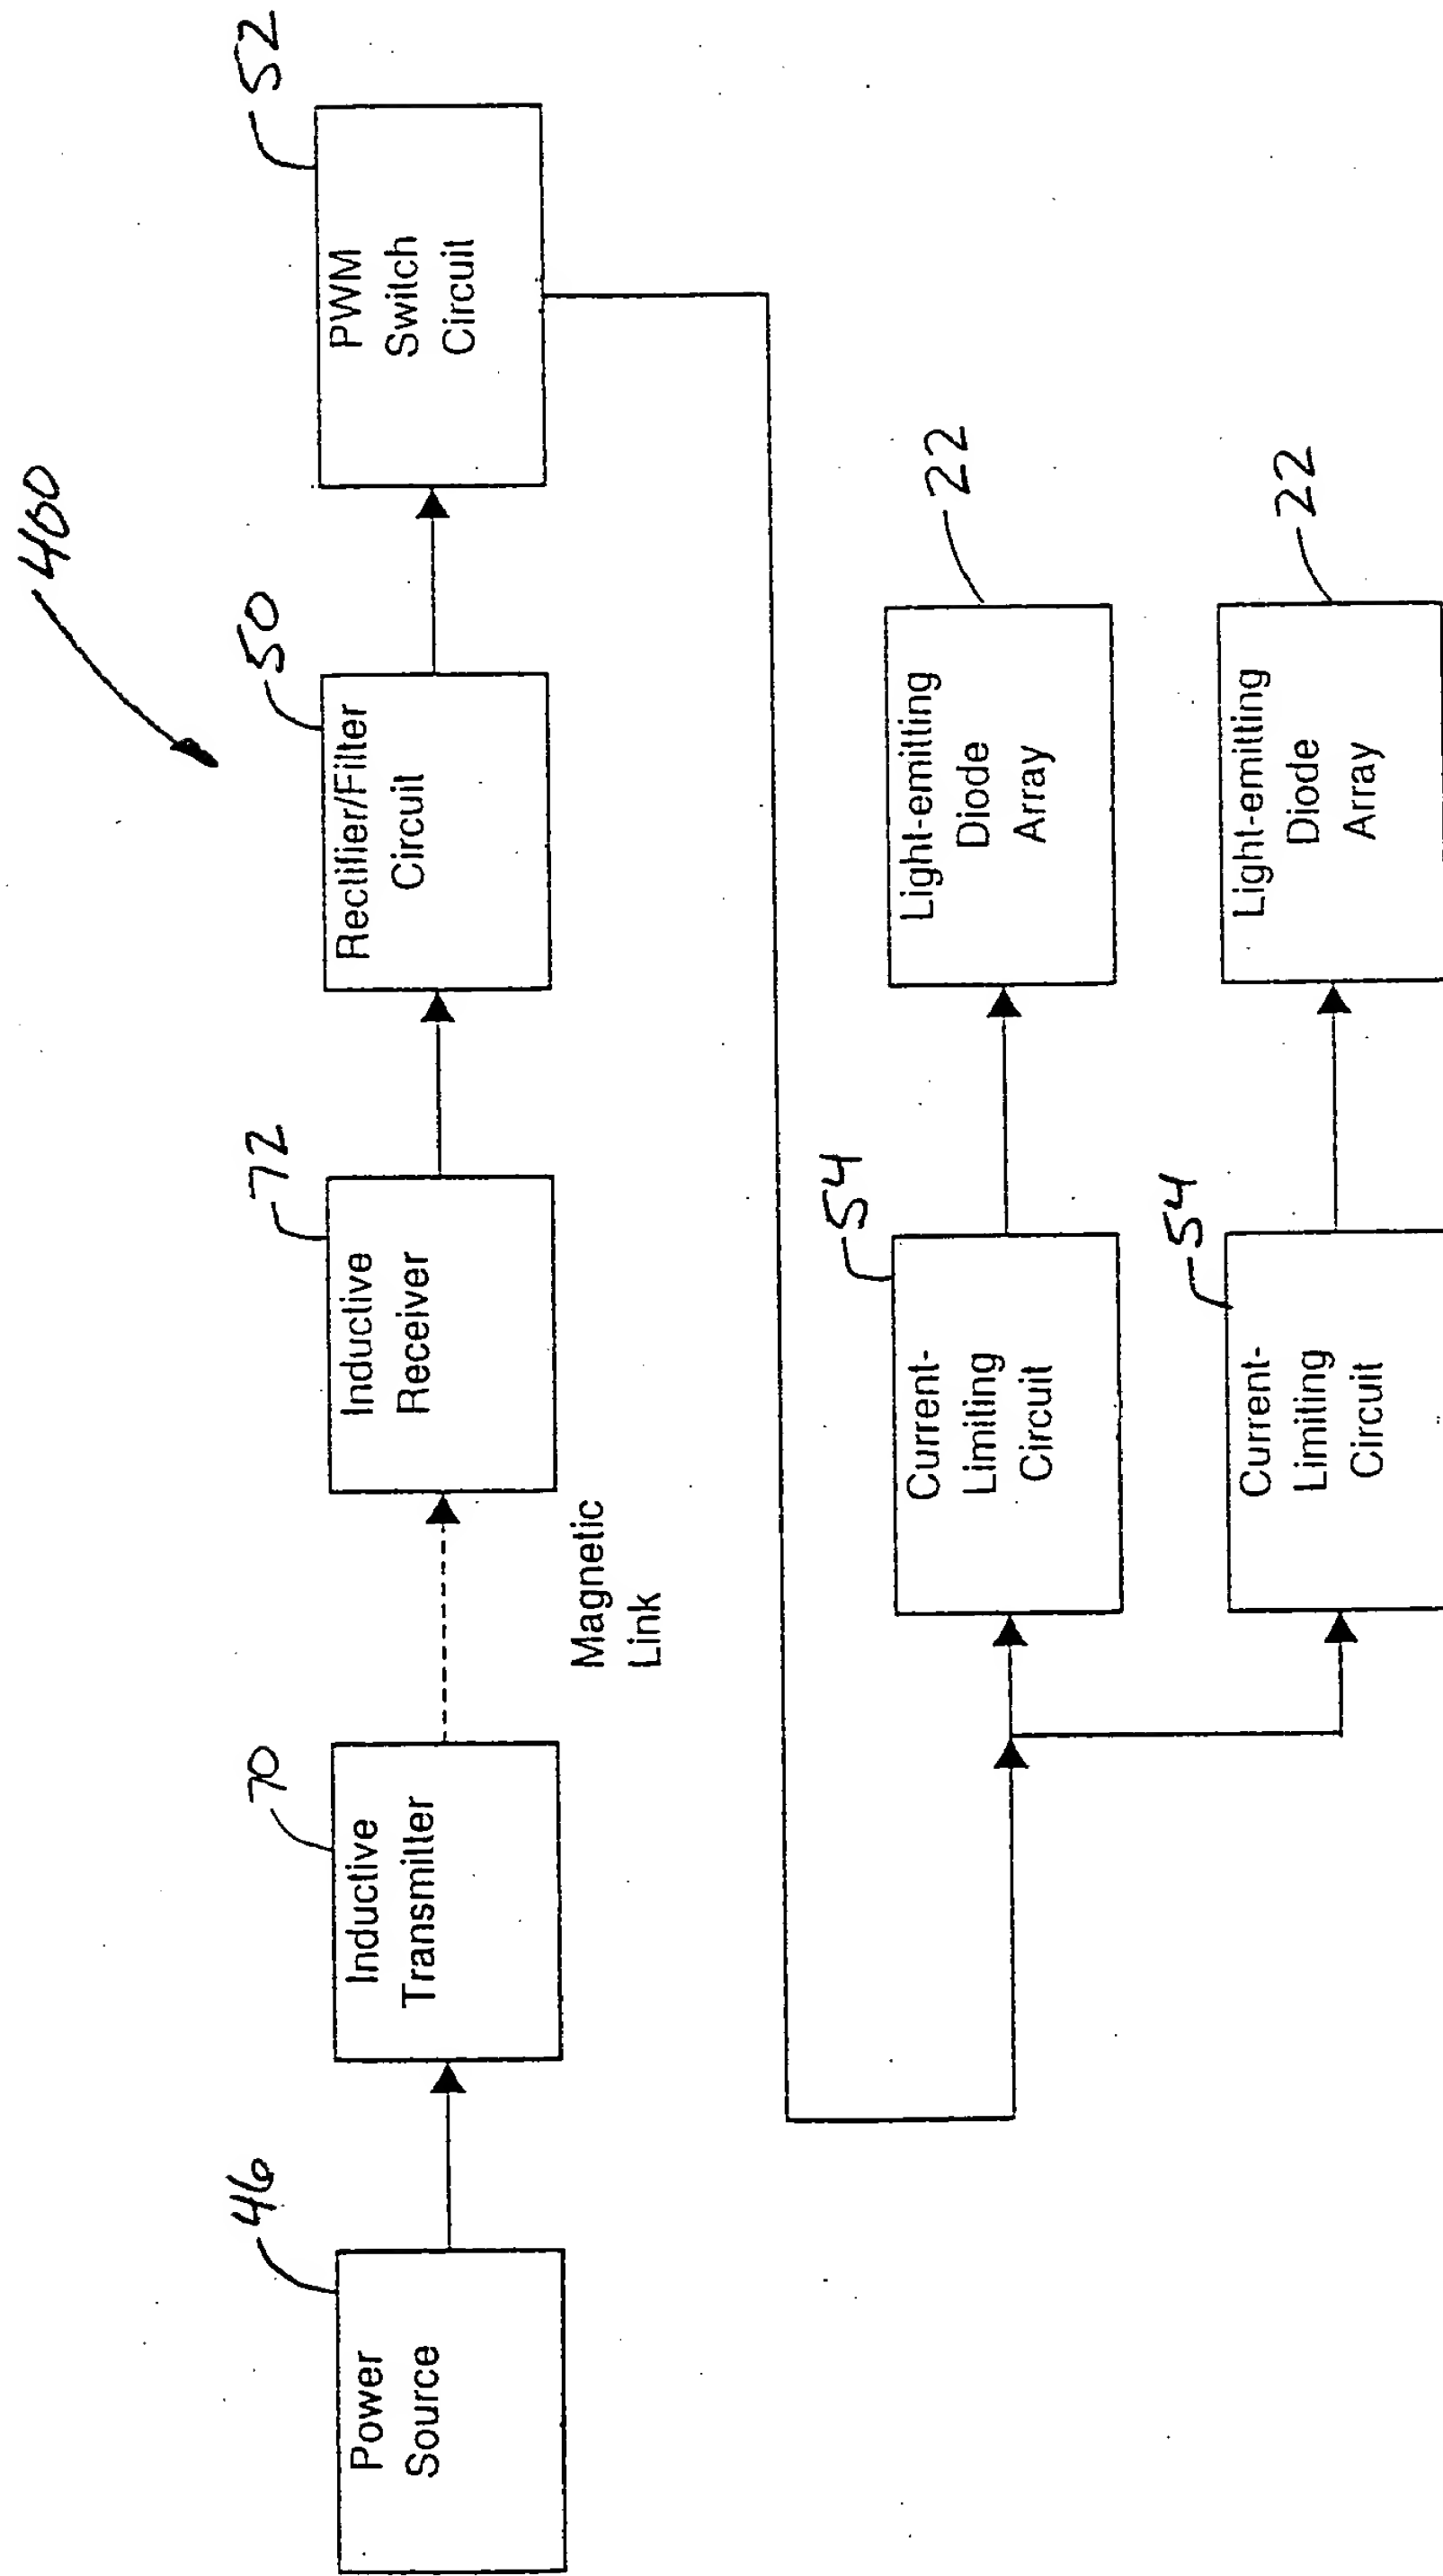


FIG. 10